



**EVALUATION SUBJECT:**  
**NO-BURN® PLUS, PLUS THB, PLUS XD, PLUS MIH, ORIGINAL, ORIGINAL MIH, WOOD GARD AND WOOD GARD MIH.**

**REPORT HOLDER:**

**No-Burn®, Inc.**  
**1392 High Street**  
**Wadsworth, Ohio 44281**  
**(800) 989-8577**  
[www.noburn.com](http://www.noburn.com)

**CSI Division: 09 00 00 FINISHES**  
**CSI Section: 09 96 46 Intumescent Paints**  
**CSI Section: 09 96 43 Fire-Retardant Coatings**

### 1.0 SCOPE OF EVALUATION

#### 1.1 Compliance to the following codes & regulations:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018, 2015, 2012, 2009 and 2006 International Existing Building Code® (IEBC)

#### 1.2 Evaluated in accordance with:

- IAPMO UES EC017, Evaluation Criteria for Field-Applied Fire Protective Coatings
- ICC-ES AC377, Acceptance Criteria for Spray-Applied Foam Plastic Insulation
- ICC-ES AC456 Acceptance Criteria for Fire-Protective Coatings Applied to Spray-Applied Foam Plastic Insulation Installed Without a Code-Prescribed Thermal Barrier

#### 1.3 Properties assessed:

- Surface burning characteristics
- Interior finishes
- Alternative thermal barrier assemblies
- Alternative ignition barrier assemblies
- Fire resistance

### 2.0 PRODUCT USE

No-Burn® coatings comply with the IBC®, IRC® and IEBC® for use in new and existing buildings. Applied to the substrates listed in [Tables 1](#) through [5](#) of this report, No-Burn® coatings provide the following attributes:

1. Surface burning characteristics and interior finish in accordance with Section 3.2 of this report.
2. Alternative thermal barrier assemblies in accordance with Section 3.3 of this report.
3. Alternative ignition barrier assemblies in accordance with Section 3.4 of this report.
4. Fire resistance performance in accordance with Section 3.5 and 3.6 of this report.

### 3.0 PRODUCT DESCRIPTION

#### 3.1 Product information

**3.1.1** No-Burn® Original, No-Burn® Original Mih, No-Burn® Wood Gard and No-Burn® Wood Gard Mih are transparent, water-based liquids, packaged in 5-gallon (18.9 L) pails and 55-gallon (208 L) drums. The coatings have a shelf life of two years when stored in unopened containers between 40°F and 90°F (4.4°C and 32.2°C). No-Burn® Original, No-Burn® Original Mih, No-Burn® Wood Gard and No-Burn® Wood Gard Mih shall be mixed with a power mixing wand or equivalent at or between 500-900 RPM for a mixing time of 5 minutes per container.

**3.1.2** No-Burn® Plus, No-Burn® Plus ThB, No-Burn® Plus XD, and No-Burn® Plus Mih are white, water-based latex liquids, which exhibit intumescent properties when exposed to elevated temperatures and flame, packaged in 5-gallon (18.9 L) pails and 55-gallon (208 L) drums. No-Burn® Plus, No-Burn® Plus XD, and No-Burn® Plus Mih have a shelf life of two years when stored in unopened containers between 40°F and 90°F (4.4°C and 32.2°C). No-Burn® Plus ThB has a shelf life of 18 months when stored in unopened containers between 40°F and 90°F (4.4°C and 32.2°C). No-Burn® Plus, No-Burn® Plus ThB, No-Burn® Plus XD, and No-Burn® Plus Mih shall be mixed with a power mixing wand or equivalent at or between 500-1500 RPM for a mixing time of 5 minutes per container.

**3.2 Surface Burning Characteristics:** As shown in [Table 1](#) of this report, No-Burn® Plus, No-Burn® Plus ThB, No-Burn® Plus Mih, No-Burn® Original, No-Burn® Original Mih, No-Burn® Wood Gard and No-Burn® Wood Gard Mih provide Class A interior finish when applied to the specified substrates. When tested in accordance with ASTM E84 or UL 723, the listed coatings provide flame spread indices complying with ranges set forth for interior finishes in IBC® Section 803.1 of the 2018, 2015, 2012, 2009, and 2006 IBC®, Section R302.9 of the 2018, 2015, 2012 and 2009 IRC®, and Section R315.1 of the 2006 IRC®.

**3.3 Alternative Thermal Barrier Assemblies:** No-Burn® Plus ThB when applied to spray-applied polyurethane foam insulation listed in [Table 2](#) of this report may be installed without a prescriptive 15-minute thermal barrier in accordance with Section 2603.9 of the 2018 and 2015 IBC®, Section 2603.10 of the 2012 IBC®, Section 2603.4 of the 2009 and 2006 IBC®, Section R316.6 of the 2018, 2015 and 2012 IRC®, Section R316.4 of the 2009 IRC® and Section R314.4 of the 2006 IRC®.

As shown in [Table 2](#) of this report, No-Burn® Plus provides an alternative thermal barrier assembly for walls and ceilings when applied to Structural Insulated Panels (SIPs) with a

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, as applicable, in accordance with IBC Section 104.11. This document shall only be reproduced in its entirety.





maximum combined thickness of 12 <sup>3</sup>/<sub>8</sub> inches (314 mm), consisting of a composite of nominal 11 ½ inches (292 mm) thick expanded polystyrene foam plastic core, (1.0 pcf [16 kg/m<sup>3</sup>], density) sandwiched between two <sup>7</sup>/<sub>16</sub>-inch-thick (11 mm) oriented strand board (OSB) sheets in accordance with Section 2603.9 of the 2018 and 2015 IBC<sup>®</sup>, Section 2603.10 of the 2012 IBC<sup>®</sup>, Section 2603.4 of the 2009 and 2006 IBC<sup>®</sup> and Section R316.6 of the 2018, 2015 and 2012 IRC<sup>®</sup>, Section R316.4 of the 2009 IRC<sup>®</sup> and R314.4 of the 2006 IRC<sup>®</sup>.

**3.4 Alternative Ignition Barrier Assemblies:** No-Burn<sup>®</sup> Plus, No-Burn<sup>®</sup> Plus XD and No-Burn<sup>®</sup> Plus ThB when applied to the spray applied polyurethane foam insulations listed in [Table 3](#) of this report may be installed in an attic or crawl space without a prescriptive ignition barrier in accordance with Sections 2603.4.1.6 of the 2018, 2015, 2012, 2009 and 2006 IBC<sup>®</sup> and Sections R316.5.3 and R316.5.4 of the 2018, 2015, 2012, and 2009 IRC<sup>®</sup> and Section R314.5.3 and R314.5.4 of the 2006 IRC<sup>®</sup>.

As shown in [Table 3](#) of this report, No-Burn<sup>®</sup> Plus XD and ZIP System<sup>®</sup> R-Sheathing may be installed in an attic or crawl space without a prescriptive ignition barrier. ZIP System<sup>®</sup> R-Sheathing (Insulating Sheathing), consists of <sup>7</sup>/<sub>16</sub>-inch-thick (11 mm) ZIP System<sup>®</sup> Wall Sheathing with a layer of maximum 1 inch thick (25.4 mm) rigid polyisocyanurate foam plastic board laminated to its interior face using PVA adhesive. The ZIP System<sup>®</sup> Wall Sheathing is OSB complying with U.S. DOC PS 2 for wood structural panels as Exposure 1 with a 24/0, 24/16, or Wall 24 span rating and is overlaid on the exterior side with a Grade D water-resistive barrier. The foam plastic insulation boards have a nominal density of 2.0 pcf (32 kg/m<sup>3</sup>), compressive strengths of 22 psi (152 kPa) and 20 psi (138 kPa), respectively, vapor permeance of less than 1.1 perm, flame-spread indices of 75 or less and smoke-developed indices of 450 or less. The ZIP System<sup>®</sup> R-Sheathing panels are nominally 4 feet (1219 mm) wide by 8, 9, 10, 11 or 12 feet (2438, 2743, 3048, 3353, or 3658 mm) long and have square-finished-edge or machined-edge profile.

No-Burn<sup>®</sup> Plus, No-Burn<sup>®</sup> Plus XD and No-Burn<sup>®</sup> Plus ThB may be installed in an attic or crawl space without a prescriptive ignition barrier when all of the following conditions are met:

- Entry to the attic or crawl space is only to repair, maintain, and service utilities and no storage are permitted.
- There are no interconnected attic or crawl space areas.
- Air in the attic or crawl space is not circulated to other parts of the building.
- Attic ventilation is provided when required by Section 1202.2 of the 2018 IBC<sup>®</sup> and 1203.2 of the 2015, 2012, 2009 and 2006 IBC<sup>®</sup> or Section R806 of the 2018, 2015, 2012, 2009 and 2006 IRC<sup>®</sup>, except when air impermeable insulation is permitted in unvented attics in accordance with Section R806.5 of the 2018, 2015 and 2012 IRC<sup>®</sup>, Section R806.4 of the 2009 and 2006 IRC<sup>®</sup>, Under-floor (crawl space)

ventilation is provided, when required, by Section 1202.4 of the 2018 IBC<sup>®</sup> and 1203.4 of the 2015 IBC<sup>®</sup>, Section 1203.3 of the 2012, 2009 and 2006 IBC<sup>®</sup> or Section R408.1 of the 2018, 2015, 2012, 2009 and 2006 IRC<sup>®</sup>, as applicable.

- The foam plastic insulation is limited to the maximum thickness and density tested, shown in [Table 3](#) of this report.
- Combustion air is provided in accordance with Section 701 of the 2018, 2015, 2012 and 2009 IMC<sup>®</sup>, or Section 701 and 703 of the 2006 IMC<sup>®</sup>.

**3.5 Fire Resistance (Table 4):** As shown in [Table 4](#) of this report, No-Burn<sup>®</sup> Plus provides fire resistance to engineered wood framing members or components when applied to both sides of the web and top and bottom flanges and the interior facing side of the subfloor, once the components are installed, as an alternative to the 2-by-10 dimension lumber prescribed in Section R302.13, Exception 4 of the 2018 and 2015 IRC<sup>®</sup> and Section R501.3, Exception 4 of the 2012 IRC<sup>®</sup>. At a minimum, the assembly shall be constructed with the framing members or components in accordance with [Table 4](#) of this report affixed to the rim board with 16d common or 10d box nails or fasteners in accordance with Table R602.3 (1) of the 2018 and 2015 IRC<sup>®</sup> or 8d nails or fasteners in accordance with the 2012, 2009 and 2006 IRC<sup>®</sup>, 23/32" tongue and groove oriented strand board subfloor affixed with 8d common nails or fasteners in accordance with Table R602.3 (1).

**3.6 Fire Resistance (Table 5):** As shown in [Table 5](#) of this report, No-Burn<sup>®</sup> Plus provides fire resistance to engineered wood framing members or components when applied to both sides of the web and top and bottom flanges, once the components are installed, as an alternative to the 2-by-10 dimension lumber prescribed in Section R302.13, Exception 4 of the 2018 and 2015 IRC<sup>®</sup> and Section R501.3, Exception 4 of the 2012 IRC<sup>®</sup>.

## 4.0 DESIGN AND INSTALLATION

**4.1 General:** The coatings shall be field-applied to substrates in accordance with this report and the No-Burn<sup>®</sup>, Inc. published instructions. When coatings are applied in accordance with Section 3.5 or Section 3.6 for Fire Resistance, the applicator shall be qualified by No-Burn<sup>®</sup>, Inc. Copies of this report and the No-Burn<sup>®</sup>, Inc. instructions shall be available at the jobsite. Where conflicts occur, the more restrictive shall govern. Before and during coating application, substrate surfaces shall be dry, clean and free from loose debris, dirt, grease, oil and all prior coating materials such as paint, stains and sealers. The substrate shall not have, nor have been exposed to, treatments, chemicals, coatings, etc.

Visual observation of the applied coatings varies. Opaque coatings will result in a distinctive white color. Transparent coatings may result in a distinctive color dye on the substrate. For verification of the wet applied thickness, a standard



painter's thickness gauge shall be used during the application. The finished dry mil thickness will be 0.40-0.70 times the wet mil thickness. When verification of transparent coatings is required by the code official, field testing shall be conducted as follows: flame from a propane-fueled torch shall be applied to the coated area and to a sample of uncoated substrate for a minimum of 10 seconds. The presence of the coating shall be observable through the comparison of the reactions of the coated and uncoated substrates to the flame.

The coatings shall be applied only to the specific substrates listed in [Tables 1](#) through 5 of this report. Immediately before placing the coatings, the applicator shall verify the moisture content of the substrates, as applicable, in accordance with [Table 1](#), [Table 2 \(SIPs only\)](#), [Table 4](#) or [Table 5](#) of this report. Substrates shall be in their final position in the building, directly exposed to the interior, protected from the weather, in conditioned and unconditioned locations. Surface and ambient temperatures before and during application shall be 40°F (4.4°C) minimum. Surface temperatures shall not exceed 100°F (37.7°C) during application. Cure time is 24 hours minimum.

The coatings shall be applied at an application rate set forth in [Table 1](#), [Table 2](#), [Table 3](#), [Table 4](#) or [Table 5](#) of this report by spraying, roller or brush. When coatings are applied in accordance with Section 3.5 and Table 4 or Section 3.6 and Table 5, the frequency of thickness measurements with a wet film thickness gauge during the application of each coat shall be at a minimum, measured once every 100 ft<sup>2</sup> (9.29 m<sup>2</sup>) of surface area.

**4.2 Design:** No-Burn<sup>®</sup> Plus, No-Burn<sup>®</sup> Plus ThB, No-Burn<sup>®</sup> Plus XD, No-Burn<sup>®</sup> Plus Mih, No-Burn<sup>®</sup> Original, No-Burn<sup>®</sup> Original Mih, No-Burn<sup>®</sup> Wood Gard and No-Burn<sup>®</sup> Wood Gard Mih shall be applied in one coat and may be overcoated with latex paint per manufacturer's instructions.

## 5.0 LIMITATIONS

The No-Burn<sup>®</sup> coatings described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

**5.1** The coatings shall be applied in accordance with this report, the manufacturer's instructions and the applicable code. In the event of a conflict between the manufacturer's instructions and this report, the more restrictive shall prevail.

**5.2** Application is limited to the substrates listed in [Tables 1](#) through 5 of this report.

**5.3** When coatings are applied in accordance with Section 3.5 or Section 3.6 of this report for Fire Resistance, the coatings shall be applied prior to installation of mechanical, electrical and plumbing components.

**5.4** When coatings are applied in accordance with Section 3.5 or Section 3.6 of this report for Fire Resistance, the No-

Burn<sup>®</sup> qualified applicator shall affix a No-Burn<sup>®</sup>, Inc. issued label, shown in [Figure 1](#) of this report, to the substrate where the coating has been applied; at a minimum, one No-Burn<sup>®</sup>, Inc. issued label shall be affixed every 10,000 feet<sup>2</sup> (929.03 m<sup>2</sup>) of floor area.

**5.5** When coatings are applied in accordance with Section 3.5 or Section 3.6 of this report for Fire Resistance, an installation certificate as shown in [Figure 2](#) of this report shall be completed by the applicator and submitted to the code official and No-Burn<sup>®</sup>, Inc.

**5.6** No-Burn<sup>®</sup> coatings shall be applied to areas within the weatherproofing membrane or surfaces not exposed to weather, where the substrate's in-service dry-use moisture content conditions are expected to be at or less than the recommended levels in accordance with [Table 1](#), [Table 2 \(SIPs only\)](#), [Table 4](#) or [Table 5](#) of this report.

**5.7** Other inspections may be required when determined to be necessary by the code official in accordance with Section R109.1.5 of the 2018, 2015, 2012, 2009 and 2006 IRC<sup>®</sup>. Special inspection shall be required when determined to be necessary by the code official in accordance with Section 1705.1.1 of the 2018, 2015 and 2012 IBC<sup>®</sup> or Section 1704.15 of the 2009 IBC<sup>®</sup> or 1704.13 of the 2006 IBC<sup>®</sup>. A statement of special inspection in accordance with Section 1704.2.3 of the 2018, 2015 and 2012 IBC<sup>®</sup> or 1705 of the 2009 or 2006 IBC<sup>®</sup> shall be submitted.

**5.8** The coatings are manufactured in Sandusky, Ohio, under a quality control program with inspections by Intertek Testing Services NA Ltd. (AA-647).

## 6.0 SUBSTANTIATING DATA

Data in accordance with the IAPMO UES Evaluation Criteria for Field-Applied Fire Protective Coatings (EC017) adopted February 2014 (editorially revised March 2015).

Data in accordance with ICC-ES AC377 Acceptance Criteria for Spray-Applied Foam Plastic Insulation, dated April 2016, including test reports in accordance with Appendix X of AC377.


Data in accordance with ICC-ES AC456 Acceptance Criteria for Fire-Protective Coatings Applied to Spray-Applied Foam Plastic Insulation Installed Without a Code-Prescribed Thermal Barrier, dated October 2015.

Reports of fire tests conducted in accordance with ASTM E84, ASTM E119, NFPA 286 (AC377, Appendix X), UL 723, and UL 1715.



## 7.0 IDENTIFICATION

Containers of the coatings are identified by a label affixed on product packaging. The label shall include the No Burn<sup>®</sup>, Inc., name and address, product name, batch number, expiration date, application instructions, name or logo of the inspection agency (Intertek Testing Services NA Ltd.) and the IAPMO Uniform ES Mark of Conformity; and the Evaluation Report Number (ER-305) to identify the products recognized in this report. A die-stamp label may also substitute for the label. Either Mark of Conformity may be used as shown below:

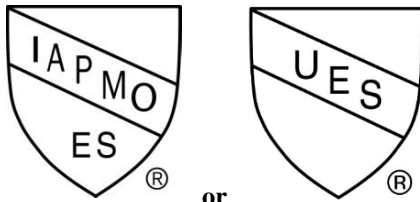

IAPMO UES ER-305

*Brian Gerber*

**Brian Gerber, P.E., S.E.**  
Vice President, Technical Operations  
Uniform Evaluation Service

*Richard Beck*

**Richard Beck, PE, CBO, MCP**  
Vice President, Uniform Evaluation Service

*Russ Chaney*

**GP Russ Chaney**  
CEO, The IAPMO Group

## NO-BURN<sup>®</sup> INSTALLATION LABEL

|  |
|--|
| ○  |
| <b>Product Name:</b>                               |
| _____  |
| <b>Certified Applicator Number:</b>                |
| X00000000NB0000                                    |
| _____  |
| <b>IAPMO UES ER 305</b>                            |
| <b>NO-BURN<sup>®</sup> INC.</b>                    |
| <a href="http://www.noburn.com">www.noburn.com</a> |

Figure 1

For additional information about this evaluation report please visit [www.uniform-es.org](http://www.uniform-es.org) or email us at [info@uniform-es.org](mailto:info@uniform-es.org)

## 8.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on No-Burn<sup>®</sup> Plus, No-Burn<sup>®</sup> Plus ThB, No-Burn<sup>®</sup> Plus XD, No-Burn<sup>®</sup> Plus Mih, No-Burn<sup>®</sup> Original, No-Burn<sup>®</sup> Original Mih, No-Burn<sup>®</sup> Wood Gard and No-Burn<sup>®</sup> Wood Gard Mih to assess conformance to the codes shown in section 1.0 of this report and serves as documentation of the product certification. Products are manufactured at locations noted under Report Holder, this report is under a quality control program with periodic inspection under the supervision of IAPMO UES.





**TABLE 1 - CLASS A INTERIOR FINISH**

| SUBSTRATE             | MAX MOISTURE CONTENT | NO-BURN® PRODUCT NAME                          |  |  |  |  |  |  |
|-----------------------|----------------------|--|--|--|--|--|--|--|
|                       |                      | Plus <sup>2</sup>                              | Plus ThB                                       | Plus Mih                                       | Original                                       | Original Mih                                   | Wood Gard                                      | Wood Gard Mih                                  |
| Douglas Fir           | 19%                  | 6mils wet(4mils dry)<br>275 sq. ft. per gallon | NR   | 6mils wet(4mils dry)<br>275 sq. ft. per gallon | 5mils wet(2mils dry)<br>300 sq. ft. per gallon | NR   | 5mils wet(3mils dry)<br>300 sq. ft. per gallon | 5mils wet(3mils dry)<br>300 sq. ft. per gallon |
| Red Oak               | 19%                  | 6mils wet(4mils dry)<br>275 sq. ft. per gallon | NR   | NR   | NR   | NR   | NR   | NR   |
| Oriented Strand Board | 16%                  | 8mils wet(5mils dry)<br>200 sq. ft. per gallon | 8mils wet(5mils dry)<br>200 sq. ft. per gallon | NR   | 5mils wet(2mils dry)<br>300 sq. ft. per gallon | NR   | NR   | 5mils wet(3mils dry)<br>300 sq. ft. per gallon |
| Southern Yellow Pine  | 19%                  | NR   | NR   | NR   | NR   | 5mils wet(2mils dry)<br>300 sq. ft. per gallon | NR   | NR   |

<sup>1</sup>NR = Not Recognized

<sup>2</sup>Coating may be overcoated with up to seven coats of latex paint with a pH of 7 to 8

**TABLE 2 -ALTERNATIVE THERMAL BARRIER ASSEMBLIES**

| SUBSTRATE  | NO-BURN® PRODUCT NAME | MAXIMUM THICKNESS (in) Walls & Vertical Surfaces | MAXIMUM THICKNESS (in) Ceilings, Underside of Roof Sheathing/Rafters & Floors | APPLICATION OF NO-BURN® COATING    |          |  | Evaluation Report <sup>1</sup> |
|--|-----------------------|--|---|------------------------------------|----------|--|--------------------------------|
|  |                       |  |   | MINIMUM INSTALLED THICKNESS (mils) |          | THEORETICAL APPLICATION RATE (gallons per 100 square feet) |                                |
|  |                       |  |   | Wet Film                           | Dry Film |  |                                |
| BASF Enerlite G Open Cell Spray Foam                 | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | CCRR-1032                      |
| BASF Enerlite NM Open Cell Spray Foam                | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | CCRR-1032                      |
| BASF Enerlite IB-418 Open Cell Spray Foam            | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | CCRR-1032                      |
| BASF Spraytite SP Closed Cell Spray Foam             | Plus ThB <sup>2</sup> | 6  | 8   | 14                                 | 9        | 0.87   | CCRR-1031                      |
| BASF Spraytite 158 Closed Cell Spray Foam            | Plus ThB <sup>2</sup> | 6  | 8   | 14                                 | 9        | 0.87   | CCRR-1031                      |
| BASF Spraytite 81205 Closed Cell Spray Foam          | Plus ThB <sup>2</sup> | 6  | 8   | 14                                 | 9        | 0.87   | CCRR-1031                      |
| BASF Spraytite 178 Closed Cell Spray Foam            | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | CCRR-1031                      |
| BASF Spraytite 81206 Closed Cell Spray Foam          | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | CCRR-1031                      |
| BASF Walltite HP+ Closed Cell Spray Foam             | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | CCRR-1031                      |
| BASF Walltite US-N Closed Cell Spray Foam            | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | CCRR-1031                      |
| BASF Walltite US Closed Cell Spray Foam              | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | CCRR-1031                      |
| BASF Walltite 200 Closed Cell Spray Foam             | Plus ThB <sup>2</sup> | 6  | 8   | 17                                 | 11       | 1.06   | ESR-2642                       |
| Icnene Classic Open Cell Spray Foam                  | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-1826                       |
| Icnene Classic Ultra Open Cell Spray Foam            | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-1826                       |
| Icnene Classic Ultra Select Open Cell Spray Foam     | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-1826                       |
| Icnene Classic Plus Open Cell Spray Foam             | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-1826                       |
| Icnene Prime Gold Open Cell Spray Foam               | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-4323                       |
| Icnene ProSeal Closed Cell Foam                      | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | ESR-3500                       |
| Icnene ProSeal LE Closed Cell Foam                   | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | ESR-3500                       |
| Icnene ProSeal Eco Closed Cell Foam                  | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | ESR-3493                       |
| Icnene ProSeal HFO Closed Cell Foam                  | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | CCRR-1108                      |
| Icnene ProSeal HFO CW Closed Cell Foam               | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | CCRR-1108                      |
| Icnene MD-C-200 Closed Cell Foam                     | Plus ThB <sup>2</sup> | 4  | 8   | 14                                 | 9        | 0.87   | ESR-3199                       |
| Johns Manville JM Corbond Open Cell Spray Foam       | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | CCRR-1079                      |
| Johns Manville JM Corbond OCX Open Cell Spray Foam   | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | ER-372                         |
| Johns Manville JM Corbond III Closed Cell Spray Foam | Plus ThB <sup>2</sup> | 6  | 8   | 14                                 | 9        | 0.87   | ER-146                         |
| Johns Manville JM Corbond MCS Closed Cell Spray Foam | Plus ThB <sup>2</sup> | 6  | 8   | 14                                 | 9        | 0.87   | ESR-3159                       |
| Lapolla Foam-Lok FL 450 Open Cell Spray Foam         | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-4242                       |
| Lapolla Foam-Lok FL 500 Open Cell Spray Foam         | Plus ThB <sup>2</sup> | 8 ½  | 14  | 14                                 | 9        | 0.87   | CCRR-1091                      |
| Lapolla Foam-Lok FL 750 Open Cell Spray Foam         | Plus ThB <sup>2</sup> | 6  | 14  | 16                                 | 11       | 1.0  | ESR-4322                       |



**TABLE 2 CONTINUED –ALTERNATIVE THERMAL BARRIER ASSEMBLIES**

| SUBSTRATE  | NO-BURN® PRODUCT NAME | MAXIMUM THICKNESS (in) Walls & Vertical Surfaces | MAXIMUM THICKNESS (in) Ceilings, Underside of Roof Sheathing/Rafters & Floors | APPLICATION OF NO-BURN® COATING    |          |  | Evaluation Report <sup>1</sup> |
|--|-----------------------|--|---|------------------------------------|----------|--|--------------------------------|
|  |                       |  |   | MINIMUM INSTALLED THICKNESS (mils) |          | THEORETICAL APPLICATION RATE (gallons per 100 square feet) |                                |
|  |                       |  |   | Wet Film                           | Dry Film |  |                                |
| Lapolla Foam-Lok FL 2000-4G Closed Cell Spray Foam | Plus ThB <sup>2</sup> | 6  | 9   | 14                                 | 9        | 0.87   | CCRR-1025                      |
| Lapolla Foam-Lok FL 2000 Closed Cell Spray Foam    | Plus ThB <sup>2</sup> | 6  | 9   | 14                                 | 9        | 0.87   | ESR-2629                       |
| SWD Quik-Shield 108 Open Cell Spray Foam           | Plus ThB <sup>2</sup> | 8  | 14  | 14                                 | 9        | 0.87   | CCRR-1051                      |
| SWD Quik-Shield 112XC Closed Cell Spray Foam       | Plus ThB <sup>2</sup> | 5  | 8   | 14                                 | 9        | 0.87   | CCRR-1011                      |
| SWD Quik-Shield 118 Closed Cell Spray Foam         | Plus ThB <sup>2</sup> | 5  | 8   | 14                                 | 9        | 0.87   | CCRR-1093                      |
| Structural Insulated Panel (SIPs) <sup>3</sup>     | Plus <sup>2</sup>     | N/A  | N/A   | 12                                 | 7        | 0.75   | N/A                            |

For SI: 1 mil = 0.0254 mm, 1 inch = 25.4 mm, 1 gal= 3.79 L

<sup>1</sup>Use of No-Burn® Plus ThB for use with any insulation product listed herein is conditional upon that insulation product's compliance to AC377 in an evaluation report by an approved evaluation entity. Users shall independently verify the current validity of any evaluation report referenced herein. ER-Evaluation Reports from IAPMO Uniform Evaluation Service, CCRR-Code Compliance Research Reports from Intertek, and ESR-Evaluation Service Reports from ICC-ES.

<sup>2</sup>No-Burn® Plus ThB or Plus may be overcoated with latex paint with a pH of 7 to 8

<sup>3</sup>The maximum moisture content is limited to 16%.

**TABLE 3 –ALTERNATIVE IGNITION BARRIER ASSEMBLIES**

| SUBSTRATE   | NO-BURN® PRODUCT NAME <sup>1</sup> | MAXIMUM THICKNESS (in) Walls, Vertical Surfaces & Attic Floors | MAXIMUM THICKNESS (in) Ceilings, Underside of Roof Sheathing/Rafters & Floors | APPLICATION OF NO-BURN® COATING    |          |  |
|---|------------------------------------|--|---|------------------------------------|----------|--|
|   |                                    |  |   | MINIMUM INSTALLED THICKNESS (mils) |          | THEORETICAL APPLICATION RATE (gallons per 100 square feet) |
|   |                                    |  |   | Wet Film                           | Dry Film |  |
| BASF ENERTITE® G Open Cell Spray Foam                     | Plus XD or Plus ThB                | 11 ¼   | 16  | 6                                  | 4        | 0.37   |
| BASF ENERTITE® NM Open Cell Spray Foam                    | Plus XD or Plus ThB                | 11 ¼   | 16  | 6                                  | 4        | 0.37   |
| BASF SPRAYTITE® 158 and 81205 Closed Cell Spray Foam      | Plus XD or Plus ThB                | 8  | 8   | 6                                  | 4        | 0.37   |
| BASF SPRAYTITE® SP Closed Cell Spray Foam                 | Plus XD or Plus ThB                | 8  | 8   | 6                                  | 4        | 0.37   |
| Accella Bayseal™ OC Open Cell Spray Foam                  | Plus XD or Plus ThB                | 11 ¼   | 16  | 6                                  | 4        | 0.37   |
| Convenience Touch 'n Seal® 2.0 PCF Closed Cell Spray Foam | Plus XD or Plus ThB                | 2  | 2   | 8                                  | 5        | 0.5  |
| Demilec SEALECTION® 500 Open Cell Spray Foam              | Plus XD or Plus ThB                | 9 ¼  | 11 ¼  | 6                                  | 4        | 0.37   |
| Demilec SEALECTION Agribalance® Open Cell Spray Foam      | Plus XD or Plus ThB                | 9 ½  | 11 ½  | 10                                 | 6        | 0.63   |
| ICP Handi-Foam® E-84 Class 1(A) Closed Cell Spray Foam    | Plus XD or Plus ThB                | 2  | 2   | 10                                 | 6        | 0.63   |
| Huber ZIP System® R-Sheathing Panel (R-3 & R-6)           | Plus XD or Plus ThB                | N/A  | N/A   | 10                                 | 6        | 0.63   |
| Icynene Classic (LD-C-50™) Open Cell Spray Foam           | Plus XD or Plus ThB                | 5 ½  | 14  | 6                                  | 4        | 0.37   |
| Icynene Classic Ultra Open Cell Spray Foam                | Plus XD or Plus ThB                | 5 ½  | 14  | 6                                  | 4        | 0.37   |
| Icynene Classic Ultra Select Open Cell Spray Foam         | Plus XD or Plus ThB                | 5 ½  | 14  | 6                                  | 4        | 0.37   |
| Icynene Classic Plus (LD-C-70™) Open Cell Spray Foam      | Plus XD or Plus ThB                | 8  | 14  | 6                                  | 4        | 0.37   |
| Icynene ProSeal Eco (MD-R-200) Closed Cell Spray Foam     | Plus XD or Plus ThB                | 7 ¼  | 9 ¾   | 5                                  | 3        | 0.31   |
| Tiger Foam® E-84 Fire Rated SPF Class 1 Spray Foam        | Plus XD or Plus ThB                | 2  | 2   | 10                                 | 6        | 0.63   |
| BASF ENERTITE® US Open Cell Spray Foam                    | Plus, Plus XD or Plus ThB          | 11 ¼   | 11 ¾  | 12                                 | 7        | 0.75   |
| BASF SPRAYTITE® 178 and 81206 Closed Cell Spray Foam      | Plus, Plus XD or Plus ThB          | 9 ¼  | 11 ¾  | 12                                 | 7        | 0.75   |
| BASF WALLTITE® US Closed Cell Spray Foam                  | Plus, Plus XD or Plus ThB          | 9 ¼  | 11 ¾  | 12                                 | 7        | 0.75   |
| BASF WALLTITE® US-N Closed Cell Spray Foam                | Plus, Plus XD or Plus ThB          | 9 ¼  | 11 ¼  | 12                                 | 7        | 0.75   |
| BASF WALLTITE® HP+ Closed Cell Spray Foam                 | Plus, Plus XD or Plus ThB          | 9 ¼  | 11 ¼  | 12                                 | 7        | 0.75   |
| BASF COMFORT FOAM® 178 Closed Cell Spray Foam             | Plus, Plus XD or Plus ThB          | 9 ¼  | 11 ¼  | 12                                 | 7        | 0.75   |
| Icynene MD-C-200 Closed Cell Spray Foam                   | Plus, Plus XD or Plus ThB          | 11 ¼   | 11 ¼  | 16                                 | 10       | 1.0  |

For SI: 1 mil = 0.0254 mm, 1 inch = 25.4 mm, 1 gal = 3.79 L

<sup>1</sup>No-Burn® Plus, Plus XD or Plus ThB may be overcoated with latex paint with a pH of 7 to 8



**TABLE 4 - FIRE RESISTANCE (See Section 3.5)**

| SUBSTRATE                                   | MAX MOISTURE CONTENT | MINIMUM DESIGN     |                    |                           |                 |                                 |                      | NO-BURN® PRODUCT <sup>1</sup>                      |
|---|----------------------|--------------------|--------------------|---------------------------|-----------------|---------------------------------|----------------------|--|
|   |                      | Minimum Depth (in) | Web Thickness (in) | Flange Depth x Width (in) | Moment (ft-lbs) | EI x 106 (in <sup>2</sup> -lbs) | Vertical Shear (lbs) | Plus   |
| I-joint: solid sawn flange                  | 16%                  | 9 ½                | ¾                  | 1.5 x 2                   | 2725            | 170                             | 1475                 | 15 mils wet (9 mils dry)<br>107 sq. ft. per gallon |
| I-joint: structural composite lumber flange | 16%                  | 9 ½                | ¾                  | 1.125 x 2                 | 2725            | 170                             | 1475                 | 15 mils wet (9 mils dry)<br>107 sq. ft. per gallon |
| I-joint: structural composite lumber flange | 16%                  | 11 7/8             | ¾                  | 1.125 x 1.75              | 3025            | 260                             | 1625                 | 15 mils wet (9 mils dry)<br>107 sq. ft. per gallon |

For SI: 1 mil = 0.0254 mm, 1 inch = 25.4 mm, 1 gal = 3.79 L, 1 lb = 0.45 kg

<sup>1</sup>No-Burn® Plus may be overcoated with latex paint with a pH of 7 to 8

**TABLE 5 - FIRE RESISTANCE (See Section 3.6)**

| SUBSTRATE                                   | MAX MOISTURE CONTENT | MINIMUM DESIGN     |                    |                           |                 |                                 |                      | NO-BURN® PRODUCT <sup>1</sup>                      |
|---|----------------------|--------------------|--------------------|---------------------------|-----------------|---------------------------------|----------------------|--|
|   |                      | Minimum Depth (in) | Web Thickness (in) | Flange Depth x Width (in) | Moment (ft-lbs) | EI x 106 (in <sup>2</sup> -lbs) | Vertical Shear (lbs) | Plus   |
| I-joint: solid sawn flange                  | 16%                  | 9 ½                | ¾                  | 1.5 x 2.5                 | 2800            | 198                             | 1185                 | 23 mils wet (14 mils dry)<br>70 sq. ft. per gallon |
| I-joint: structural composite lumber flange | 16%                  | 11 7/8             | ¾                  | 1.125 x 1.75              | 3025            | 260                             | 1625                 | 23 mils wet (14 mils dry)<br>70 sq. ft. per gallon |

For SI: 1 mil = 0.0254 mm, 1 inch = 25.4 mm, 1 gal = 3.79 L, 1 lb = 0.45 kg

<sup>1</sup>No-Burn® Plus may be overcoated with latex paint with a pH of 7 to 8



### NO-BURN® PRODUCT APPLICATION CERTIFICATE

LOCATION OF BUILDING:

---

Address Lot # City State Zip

DESCRIPTION AND USE OF BUILDING:

---



---



---



---

Certified Applicator Name Company Certified Applicator Number

| Moisture Meter Reading<br>(Max % Noted in Tables 4 or 5) | Temp Reading<br>(°F) | Describe Area Treated | Size of Area Treated<br>(Surface Area SqFt or Footprint SqFt) | Product Applied | Substrate<br>(Noted in Tables 4 or 5) | Qty.<br>(Wet film thickness) | Date Applied |
|--|----------------------|-----------------------|---|-----------------|---------------------------------------|------------------------------|--------------|
|  |                      |                       |   |                 |                                       |                              |              |
|  |                      |                       |   |                 |                                       |                              |              |
|  |                      |                       |   |                 |                                       |                              |              |
|  |                      |                       |   |                 |                                       |                              |              |

Certified Applicator Signature

Date of Service

Figure 2